

ULMAX[®]


50Hz

SVM/SVMT



**BOMBAS CENTRÍFUGAS
MULTIETAPAS VERTICALES**

Operación

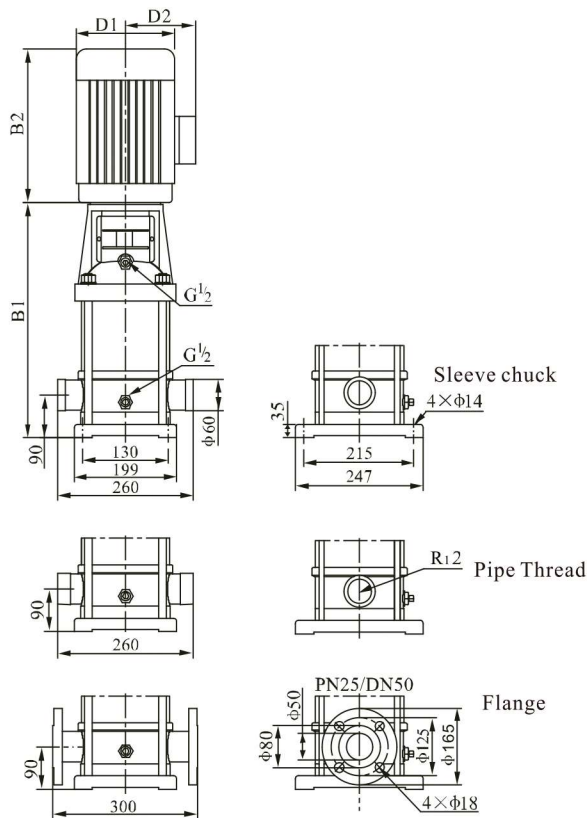

Tamaño & Peso

Modelo	Tamaño (mm)					Peso (kg)
	B1	B2	B1+B2	D1	D2	
SVM15-1	352	245	597	170	142	33
SVM15-2	397	290	687	190	155	42
SVM15-3	452	345	797	197	165	50
SVM15-4	497	355	852	230	185	59
SVM15-5	542	355	897	230	185	60
SVM15-6	607	390	997	260	210	77
SVM15-7	652	390	1042	260	210	78
SVM15-8	697	390	1087	260	210	86
SVM15-9	742	390	1132	260	210	87
SVM15-10	875	500	1375	330	255	160
SVM15-12	965	500	1465	330	255	161
SVM15-14	1055	500	1555	330	255	162
SVM15-17	1190	500	1690	330	255	179

Tabla de rendimiento

Modelo	Motor (kW)	Q = Caudal	l/m m³/h	133	167	200	233	250	267	300	333	383
				8	10	12	14	15	16	18	20	23
SVM15-1	1.1	H (m)		13	12	11.5	10.5	10	9	7.5	6	4.5
SVM15-2	2.2			26	25	24	23	22	20.5	18	16	13
SVM15-3	3.0			39.5	38.5	37.5	35.5	34.5	33.5	30.5	27	21
SVM15-4	4.0			53	51.5	50	47.5	46	44.5	41	36.5	29
SVM15-5	4.0			67	64.5	62.5	60	58	55.5	52	46	37
SVM15-6	5.5			80.5	78	76	73	70.5	68	63.5	57	46.5
SVM15-7	5.5			94	92	89.5	86	83.5	81	75.5	68.5	56.5
SVM15-8	7.5			107.5	106	102.5	98.5	96	93	86.5	78	64.5
SVM15-9	7.5			120	118	114.5	110	107	105	97	88	72
SVM15-10	11			134	132	128	123	120	116.5	108.5	98.5	82.5
SVM15-12	11			161	158	154	148	144	139	130	119	99
SVM15-14	11			186	183	178	172	167	162	152	139	116
SVM15-17	15			227	224	217	210	203	196	185	167	140

Tamaño y apariencia de motores monofásicos a anti explosión son diferentes.

Curva de Rendimiento

